

Hydraulic submersible pumps


Our 'HS Pumps' are designed for working at greater depths and include a choice of solids, drainer, high head or chopper pumps.

HS150 pumps are all supplied in cast iron for greater durability. Screw pumps feature ADI hard iron internals for superior abrasion resistance.

Equally efficient for use with:

- Clean water
- Water with fine or large solids
- Water with rags and fibres
- Raw and screened sewage
- Sludge or slurry

Our customers include those in the following industries: construction and civil engineering, water and wastewater, ground stabilisation and piling, municipal, industrial, oil spill recovery and pollution control.

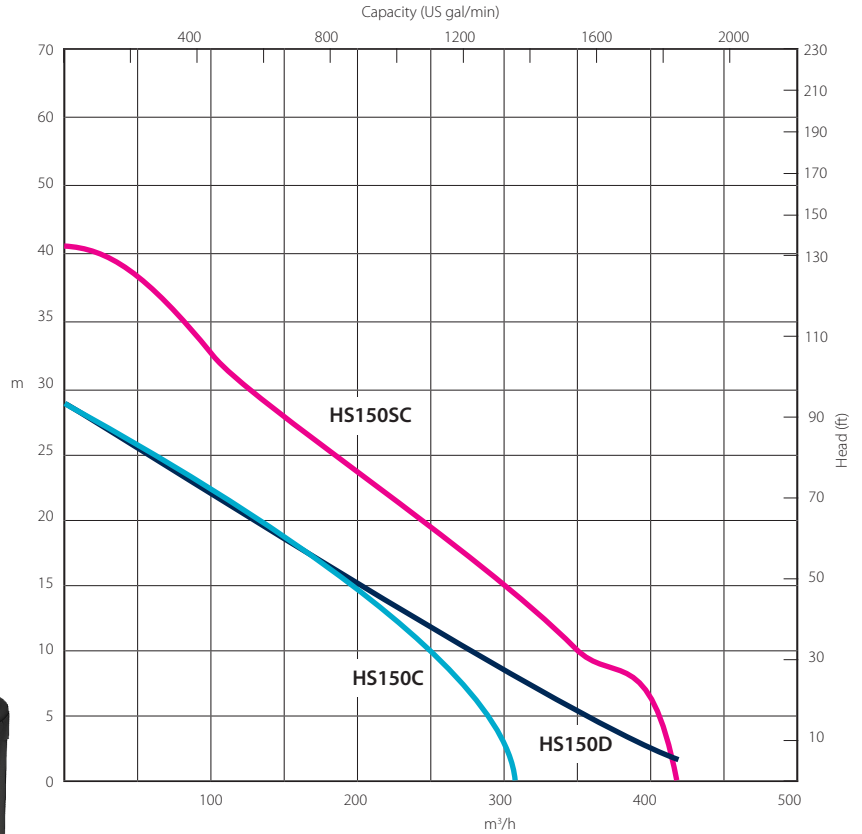

D - Drainer C - Chopper SC - Screw



Pump specification	HS150D 150mm Drainer Pt No. 1745030014		HS150C 150mm Chopper Pt No. 1745030016		HS150SC 150mm Screw Pt No. 1745030072	
	Metric	US	Metric	US	Metric	US
Capacity	420 m³/h	1849 USgpm	307 m³/h	1351 USgpm	420 m³/h	1849 USgpm
Total Head	29 m	95 ft	29 m	95 ft	41 m	134 ft
Max. Solids Size	75 mm	3 in	50 mm	2 in	75 mm	3 in
Length	609 mm	24.0 in	609 mm	24.0 in	609 mm	24.0 in
Width	708 mm	27.9 in	709 mm	27.9 in	708 mm	27.9 in
Height	777 mm	30.6 in	1085 mm	42.7 in	1085 mm	42.7 in
Weight	142 kg	313 lb	142 kg	313 lb	142 kg	313 lb
For use with the following Powerpack	HSP35, HSP35Eco		HSP35, HSP35Eco		HSP35, HSP35Eco	