Hydraulic submersible pumps

Our 'HS Pumps' are designed for working at greater depths and include a choice of solids, drainer, high head or chopper pumps.


50mm pumps are supplied in cast iron for greater durability.

Equally efficient for use with:

- Clean water
- Water with fine or large solids
- Water with rags and fibres
- Raw and screened sewage

Our customers include those in the following industries: construction and civil engineering, water and wastewater, ground stabilisation and piling, municipal, industrial, oil spill recovery and pollution control.



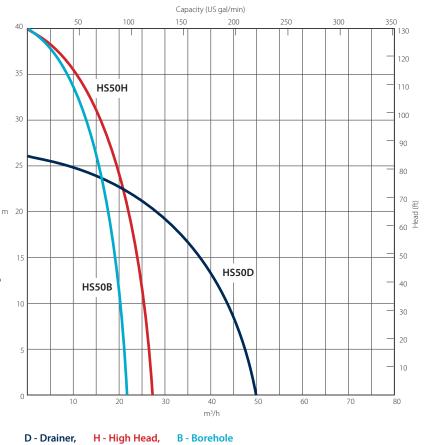

Pump specification	HS50D 50mm Drainer Pt No. 1745030002		HS50H 50mm High Head Pt No. 1745030004		HS50B 50mm Borehole Pt No. 1745030023	
	Metric	US	Metric	US	Metric	US
Capacity	50 m³/h	220 USgpm	27 m³/h	119 USgpm	22 m³/h	97 USgpm
Total Head	26 m	85 ft	40 m	131 ft	40 m	131 ft
Max. Solids Size	10 mm	0.3 in	3 mm	0.1 in	3 mm	0.1 in
Length Width Height	230 mm 258 mm 248 mm	9.0 in 10.2 in 10.0 in	230 mm 258 mm 248 mm	9.0 in 10.2 in 10.0 in	192 mm 198 mm 719 mm	7.5 in 7.8 in 28.3 in
Weight	20.0 kg	40.6 lb	20.0 kg	40.6 lb	30.0 kg	66.2 lb
For use with the following Powerpacks*	HSP10 HSP20, HSP20Eco		HSP10 HSP20, HSP20Eco		HSP10 HSP20, HSP20Eco	

* These submersible pumps are not compatible with the HSP20Eco5 powerpack.



 Head Office
 Bournemouth Road, Chandler's Ford, Eastleigh, Hampshire, SO53 3ZL
 UK.

 T +44(0)23 8026 6311
 E info@selwood.co.uk
 E